

# HELI

## OPL10-S Electric Low Level Order Picker



AC / EPS

### Characteristics



- Max. lifting height of platform is 1.2m. The capacity of loading tray is 60kg.
- Forward and backward control button located at the backrest of platform.
- Advanced electronic steering system (EPS) handle ensures effortless and highly efficient maneuverability.
- Combining of regenerative brake and electromagnetic brake provide safe and reliable brake.
- Side-way battery designs is very convenient for maintenance and replacement.
- USB charge device on the control panel which could charge phone, pad, et.
- Advanced AC control with reliable performance is adopted on the truck.
- Small turning radius ensure the trucks can be used in narrow workplace.
- With reasonable layout of the key components, it is convenient to maintain.
- The back is equipped with guardrail protection device.



## OPL10-S

### Manufacturer's Data and Technical Characteristics

Character			
1.01	Manufacturer		HELI
1.02	Model		OPL10-S
1.03	Drive mode		Electric (battery)
1.04	Driving mode		Stand-on
1.05	Load capacity	Q	kg
1.06	Load center distance	C	mm
1.07	Track	Y	mm
Tyre			
2.01	Tyre type		Polyurethane
2.02	Wheels number, Front/rear(X=driven wheels)		1x/2
2.03	Track Width, rear	b11	mm
2.04	Wheel size, front		φ250×80
2.05	Wheel size, rear		φ128×73
Dimension			
3.01	Height, mast lowered	h1	mm
3.02	Lift height of platform	h3	mm
3.03	Height, mast extended	h4	mm
3.04	Height, fork lift	h15	mm
3.05	Height, fork lowered	h13	mm
3.06	Overall length	l1	mm
3.07	Length to shank of forks	l2	mm
3.08	Overall width	b1	mm
3.09	Fork size	s/e/l	mm
3.10	Width across forks	b5	mm
3.11	Underground clearance at center of wheel base	m2	mm
3.12	Aisle width with pallet 1000x1200 (1200 refers to the pallet width across the fork)	Ast	mm
3.13	Aisle width with pallet 800x1200 (800 refers to the pallet width along the fork)	Ast	mm
3.14	Turning radius	Wa	mm
Performance			
4.01	Travelling speed, laden/unladen	km/h	7.7/7.8
4.02	Lifting speed, laden/unladen	m/s	0.1/0.15
4.03	Lowering speed, laden/unladen	m/s	0.08/0.07
4.04	Gradeability, laden/unladen	%	8/15
Electrical configuration			
5.01	Drive motor power	kw	1.5
5.02	Lifting motor power	kw	2.2
5.04	Battery capacity	V/Ah	24/450
5.05	Battery dimensions l/w/h	mm	654x305x705
5.06	Controller		CURTIS
5.07	Brake		Electromagnetic brake
Weight			
6.01	Total weight (with battery)	kg	1650
6.02	Axle load, front/rear axle, laden	kg	944/706
6.03	Axle load, front/rear axle, unladen	kg	500/2150

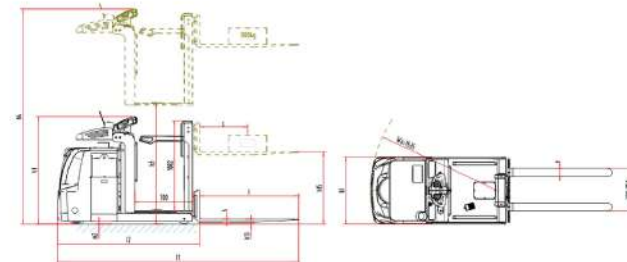

**ANHUI HELI CO., LTD.**

Add / No.668, FangXing Road, Hefei, China  
Fax / +86-551-63639966

Tel / +86-551-63639068(America); 63639258(Europe);  
63639358(Asia); 63662105(Africa & Middle East);  
63639530(Key Accounts Division); 63662105(Wheel loader)