

HELI

OPL10 OPL12

Electric Low Level Order Picker

Characteristics

- Max. lifting height of platform is 1.2M. It is very convenient to pick up goods. The capacity of storage compartment in front of the operator is 60kg.
- Advanced electronic steering system (EPS) handle ensures effortless and highly efficient maneuverability.
- Ergonomic human engineering design provides the convenience and comfort operation.
- Combining of regenerative brake and electromagnetic brake provide safe and reliable brake.
- Side-way battery designs is very convenient for maintenance and replacement.
- The USB charge device on the control panel which could charge the phone, pad and so on.
- Advanced AC control with reliable performance is adopted on the truck.
- Small turning radius ensure the trucks can be used in narrow workplace.
- With reasonable layout of the key components, it is convenient to maintain.

AC / EPS



USB charge device (closed)



USB charge device (open)



Germany Frei Handle







Large metal storage tray for small material storage with 60kg

OPL10 OPL12

Manufacturer's Data and Technical Characteristics

Characteristics				
1.01	Manufacturer		HELI	
1.02	Model		OPL10	OPL12
1.03	Drive mode		Electric	
1.04	Driving mode		Stand-on	
1.05	Load capacity	Q	kg	1000
1.06	Load center distance	C	mm	700
1.07	Track	Y	mm	1665
Tyre				
2.01	Tyre type		Polyurethane	
2.02	Wheels number,Front/rear(X=driven wheels)		1x+1/4	1x+1/4
2.03	Track Width,front	b10	mm	502
2.04	Track Width,rear	b11	mm	400
2.05	Wheel size, front		mm	φ250×80
2.06	Wheel size, rear		mm	φ80×84
Dimension				
3.01	Height, mast lowered	h1	mm	1275
3.02	Lift height	h3	mm	1140
3.03	Height, mast extended	h4	mm	2335
3.05	Height,fork lowered	h13	mm	90
3.06	Overall length	l1	mm	2885
3.07	Length to shank of forks	l2	mm	1383
3.08	Overall width	b1	mm	812
3.09	Fork size	s/w/l	mm	60×180×1500
3.10	Width across forks	b5	mm	580
3.11	Underground clearance at center of wheel base	m2	mm	29
3.12	Axis width with pallet 1000x1200 (1200 refers to the collapse width across the fork)	Ast	mm	2904
3.13	Axis width with pallet 800x1200 (800 refers to the pallet width along the fork)	Ast	mm	2904
3.14	Turning radius	Wa	mm	1920
Performance				
4.01	Travelling speed,laden/unladen		km/h	7/7.1
4.02	Lifting speed,laden/unladen		m/s	0.1/0.15
4.03	Lowering speed,laden/unladen		m/s	0.08/0.07
4.04	Gradeability,laden/unladen		%	8/15
Electrical configuration				
5.01	Drive motor power		kw	1.5
5.02	Lifting motor power		kw	2.2
5.04	Battery capacity		V/Ah	24/240
5.05	Battery dimensions l/w/h		mm	654x440x254
5.06	Controller		CURTIS	CURTIS
5.07	Brake		Electromagnetic brake	Electromagnetic brake
Weight				
6.01	Total weight(with battery)		kg	1195

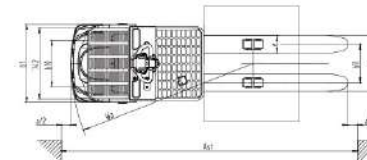

ANHUI HELI CO., LTD.
 Add / No.668, FangXing Road, Hefei, China
 Fax / +86-551-63639966

Tel / +86-551-63639068(America); 63639258(Europe);
 63639358(Asia); 63662105(Africa & Middle East);
 63639530(Key Accounts Division); 63662105(Wheel loader)

* Our products are subject to improvements and changes without notice.

Design&Print:Helix Printing 20200915